

AIR PREPARATION UNITS LUBRICATOR series

Kushako

Lubricator details :

Features :

- Suitable for modular mountings.
- Fog / Mist Type
- Fine adjustment of lubrication.
- Lubrication proportional to flow.


Precautions :

- Note the direction of flow before installation & connect pipe accordingly.
- Nipples of taper threads to be used with teflon tape. Ensure teflon tape does not enter the unit during tightening. Nipples of straight threads to be used with sealing washer.
- Flush piping for dirt, dust, rust & other foreign particles.
- Install in clean atmosphere.
- Oil may be filled when under pressure. However it is recommended to vent the air completely before filling the oil.



Technical Specifications:

Model	LUB-2012 (Eco)
Medium	Compressed air - Filtered
Port Size	G1/4 BSP (F)
Bowl capacity (ml)	40
Flow rate (Ltr / Min)	1350
Maximum supply pr. (bar)	10
Recommended oil	ISO VG 32 (Servo System 32)
Bowl material	Polycarbonate
Ambient / Medium temp.	5° - 50° C
Installation	Vertical (As in the picture)
Materials of construction	Al, Brass, Steel, Polycarbonate, SS, Nitrile
Optional accessories	Clamp, Modular mounting kit
Weight	0.127

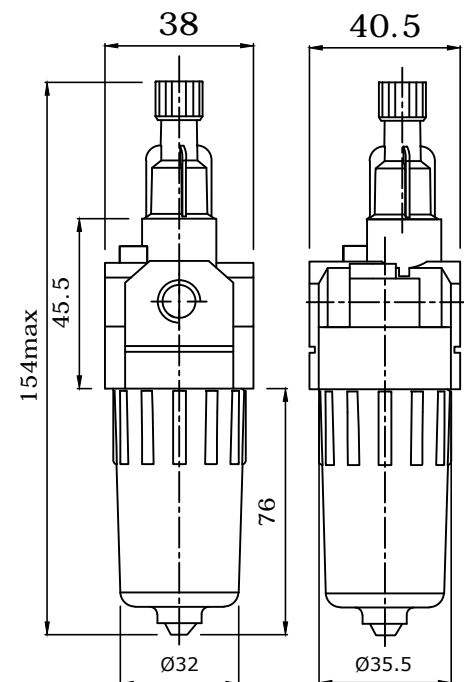

- Supply pressure 6 bar , pressure drop $p = 0.5$ bar (for standard models)



Manufactured by :

Kushako India

Office : 490, Narayan Peth, Opp. Pune Marathi Granthalaya, Pune - 411030. (Maharashtra), Website : www.kushakoindia.com

Works : Sr.No. 25/1A, Village Nanded, Sinhgad Road, Tal - Haveli, Dist. Pune -411041

Tel. No : 901169077 / 7620674777

E-mail : kushako.india@gmail.com / kushakoindia1992@gmail.com

Kushako