

# TYRE INFLATOR SOLENOID VALVE



## Tyre Inflator Solenoid Valve



### Features :

- Wide range of coil voltages.
- Continuous duty cycle.
- Low temperature of operation.
- Noiseless performance.
- Coil can be rotated by 360°.



### Technical Specifications :

|                              |                                 |
|------------------------------|---------------------------------|
| Model                        | K/TYR/IRA/3JET                  |
| Medium                       | Filtered compressed air         |
| Port Size                    | Inlet, Outlet - 18 x 1.5        |
| Ambient / Medium temperature | 5° - 60° C                      |
| Orifice (NW)                 | 1.8                             |
| Operating pressure (bar)     | 0.5 - 10                        |
| Flow rate ( Ltr / Min )      | 140                             |
| Electrical Parameters :      |                                 |
| Voltage (V) ± 10%            | DC                              |
|                              | 24                              |
| Power Consumption (Watts)    | 8                               |
| Duty Cycle                   | Continuous                      |
| Type of coil protection      | IP67                            |
| Class of insulation          | Class - F                       |
| Materials of construction    | Aluminum, Brass, SS 430, Copper |

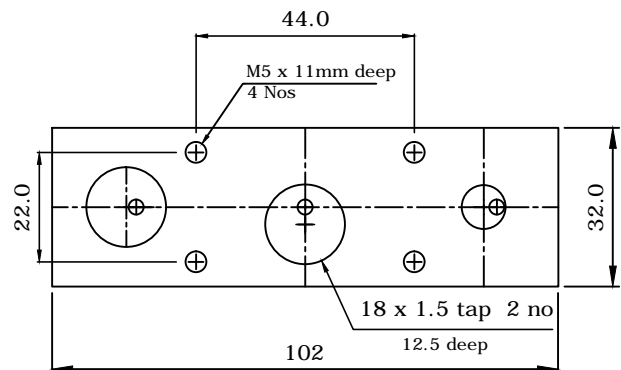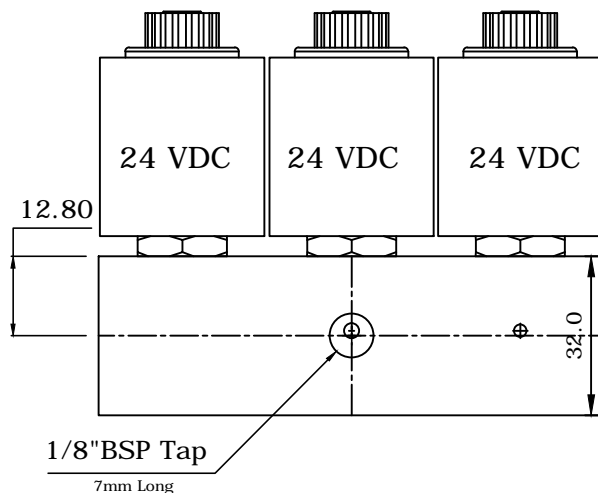

Manufactured by :

**Kushako India**

Office : 490, Narayan Peth, Opp. Pune Marathi Granthalaya, Pune - 411030. (Maharashtra), Website : [www.kushakoindia.com](http://www.kushakoindia.com)

Works : Sr.No. 25/1A, Village Nanded, Sinhgad Road, Tal - Haveli, Dist. Pune - 411041

Tel. No : 901169077 / 7620674777

E-mail : [kushako.india@gmail.com](mailto:kushako.india@gmail.com) / [kushakoindia1992@gmail.com](mailto:kushakoindia1992@gmail.com)

**Kushako**