

COMPRESSOR SOLENOID VALVES





2/2 Direct acting normally open valve

Features :

- Wide range of coil voltages.
- Continuous duty cycle.
- Low temperature of operation.
- Noiseless performance.
- Coil can be rotated by 360°.

Technical Specifications :

| | | | | | |
|------------------------------|-----------------------------------|-----|-----|----|----|
| Model | KC-2/2-NO-SB | | | | |
| Medium | Filtered compressed air | | | | |
| Port Size | Inlet, Outlet - G1/4 (F) | | | | |
| Ambient / Medium temperature | 5° - 60° C | | | | |
| Orifice (NW) | 1.3 | | | | |
| Operating pressure (bar) | 0 - 10 | | | | |
| Flow rate (Ltr / Min) | 70 | | | | |
| Electrical | | | | | |
| Voltage (V) ± 10% | AC | | | DC | |
| | 24 | 110 | 230 | 12 | 24 |
| Power Consumption (Watts) | 6 | | | 8 | |
| Duty Cycle | Continuous | | | | |
| Type of coil protection | IP65 | | | | |
| Class of insulation | Class - F | | | | |
| Materials of construction | Aluminium, Brass, Stainless Steel | | | | |

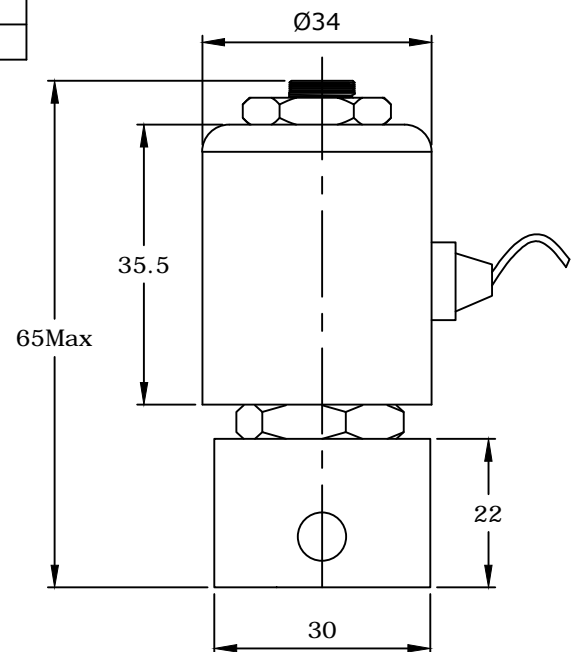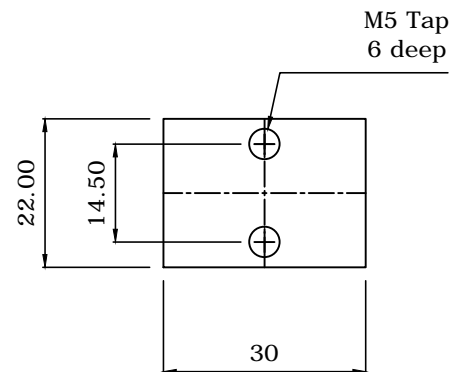

Manufactured by :

Kushako India

Office : 490, Narayan Peth, Opp. Pune Marathi Granthalaya, Pune - 411030. (Maharashtra), Website : www.kushakoindia.com

Works : Sr.No. 25/1A, Village Nanded, Sinhgad Road, Tal - Haveli, Dist. Pune -411041

Tel. No : 901169077 / 7620674777

E-mail : kushako.india@gmail.com / kushakoindia1992@gmail.com