

DENTAL SOLENOID VALVES



2/2 Direct acting Single Solenoid Valve


Features:

- Wide range of coil voltages.
- Continuous duty cycle.
- Low temperature of operation.
- Noiseless performance.
- Coil can be rotated by 360°.



Technical Specifications:

Model	ssv				
Medium	Compressed air / Water				
Port Size	G1/4 BSP (F)				
Ambient / Medium temp	5° - 60° C				
Orifice (NW)	1.8	2.4			
Operating pressure (bar)	0 - 10				
Flow rate (Ltr / Min)	140	180			
Electrical					
Voltage (V) ± 10%	AC		DC		
	24	230	12	24	
Power Consumption (Watts)	6		8		
Duty Cycle	Continuous				
Type of coil protection	IP65				
Class of insulation	Class - F				
Materials of construction	Aluminium, Brass, Stainless Steel				

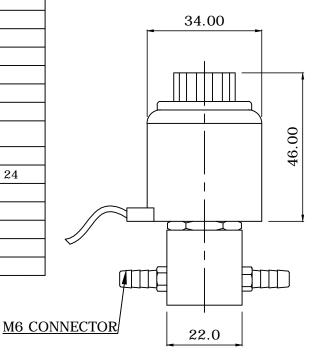

Manufactured by:

Kushako India

Office : 490, Narayan Peth, Opp. Pune Marathi Granthalaya, Pune - 411030. (Maharashtra), Website : www.kushakoindia.com Works : Sr.No. 25/1A, Village Nanded, Sinhgad Road, Tal - Haveli, Dist. Pune -411041

Tel. No: 901169077 / 7620674777

E-mail: kushako.india@gmail.com/kushakoindia1992@gmail.com